



HDX-69F-MUS
 Dakota Digital HDX Instrument Installation
 For 196-'70 Ford Mustang

Your new HDX-69F-MUS kit includes:



Installation

1. Remove the stock gauge panel from the dash, be sure to save the hardware for reassembly.






2. Remove the stock gauge cluster from the bezel and save the three separator pieces and the hardware for reassembly.


3. Reinstall the three separator pieces onto the bezel.




4. Align the HDX system on the separator pieces and use the stock hardware to secure to the bezel. The bottom two mounts of the Speed and Tach assembly will use the supplied $\frac{3}{4}$ " counter sunk screws as shown with the blue arrows.

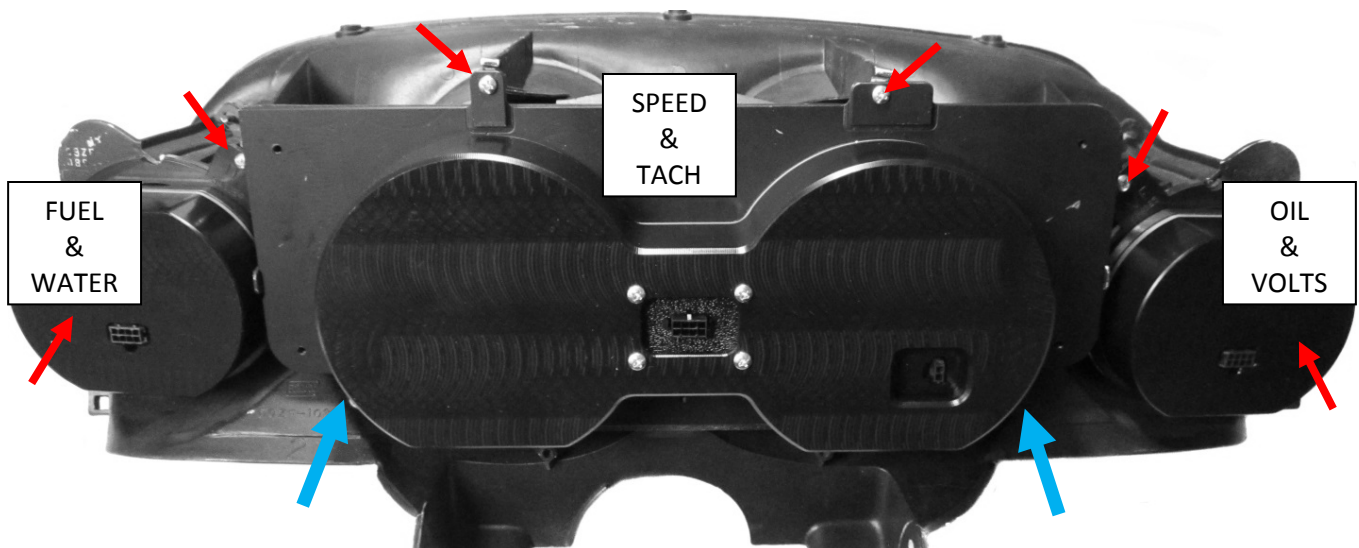

5. Make the interconnect harness connections to the gauges with their respective length ends.

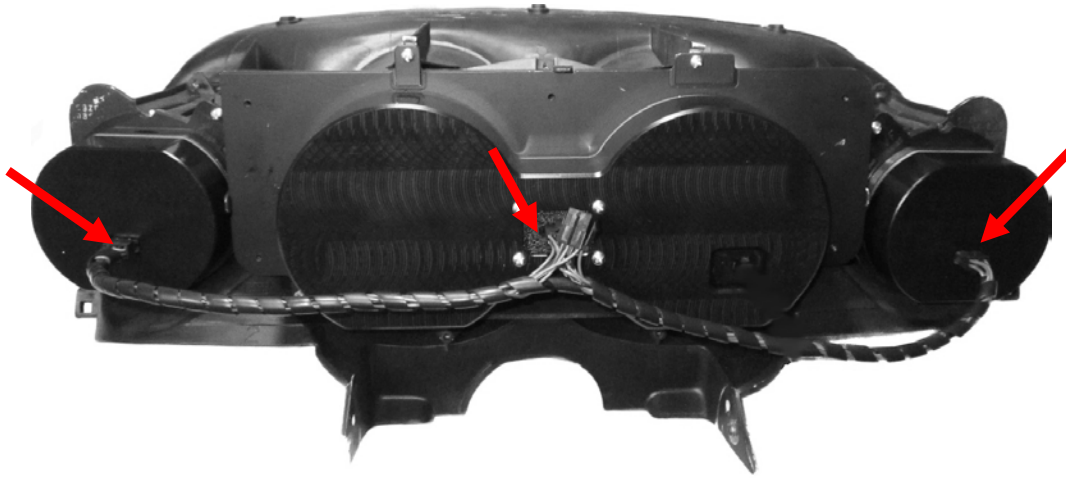

6. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the HDX system.

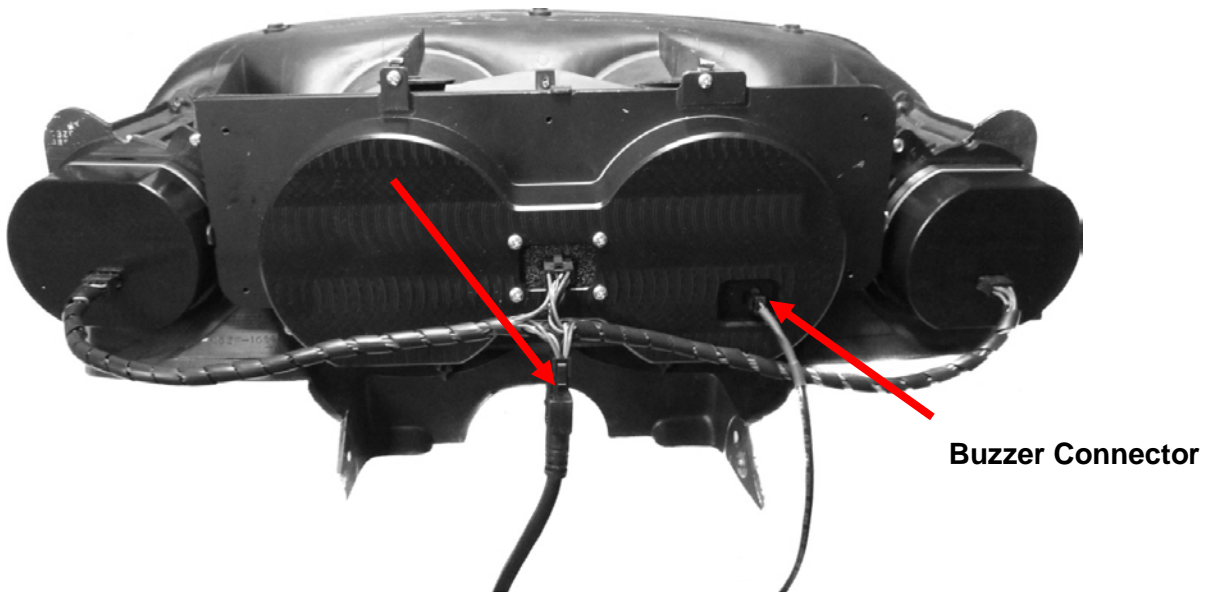

7. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com