



## 575 LED Installation Guide

**Step 1:** Install new headlamps using original bucket and trim rings.

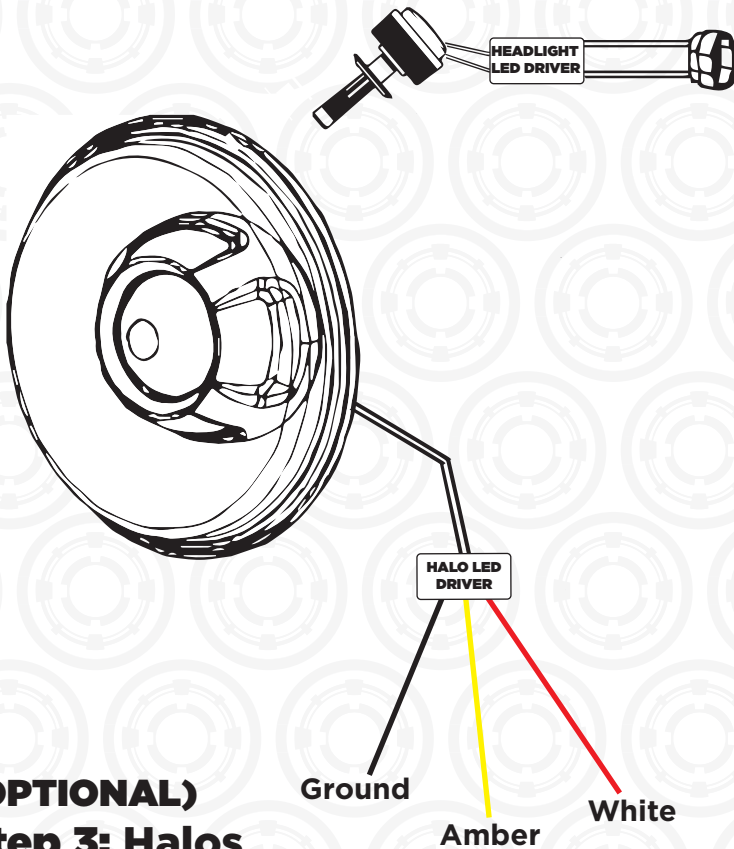

**Step 2:** Plug new H4 adapter into your original headlamp socket. Note: the difference between high beam and low beam.

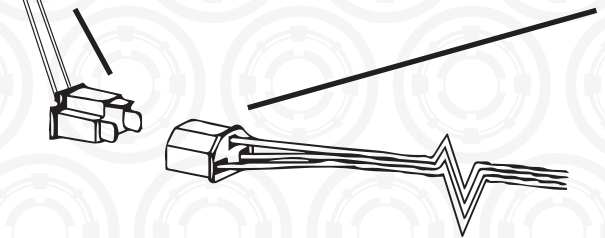

**Step 2 Continued:** Low beam will have 3 pins on the H4 Connector and high beam will only have 2 pins.

Note: If you only have 2 pins on your low beam, check the part numbers to identify low and high:

H11H4AD-L = LOW  
H11H4AD-H = HIGH

**(OPTIONAL)  
Step 3: Halos**

**Classic Halos:** There are many different options for wiring up halos.

Halo Color	Wire Color	Functionality
White	Red +	Day-Time Running
Amber	Yellow +	Turn Signal (Switchback)
-----	Black -	Ground

**Modern Halos:** You will NOT have a yellow wire.

**HDR Halos:** You may have additional wires that are used for dim/bright functionalities. A wiring guide is labeled on the Halo LED Driver.

**Pro-Tip:** Wire your White Halos (**Red Wire**) to your ignition to have your halos come on as soon as you turn your key!