



RTX-69F-MUS

Dakota Digital RTX Instrument Installation
For 1969-'70 Ford Mustang

Your new RTX-69F-MUS kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



Main Harness

Switch Assembly



Control Box

Interconnect Harness



(2) 3/4" Counter Sunk screws



Ford Speed Adapter

Installation

1. Remove the stock gauge panel from the dash, be sure to save the hardware for reassembly.




2. Remove the stock gauge cluster from the bezel. Disassemble the gauges and separate the spacers from the lenses. The only pieces that will be reused are the front bezel and three spacers as shown to the left. Ensure to keep all hardware for reassembly.


3. Reinstall the three separator pieces onto the bezel.




- Align the RTX system on the separator pieces and use the stock hardware to secure to the bezel. The bottom two mounts of the Speed and Tach assembly will use the supplied $\frac{3}{4}$ " counter sunk screws as shown with the blue arrows.

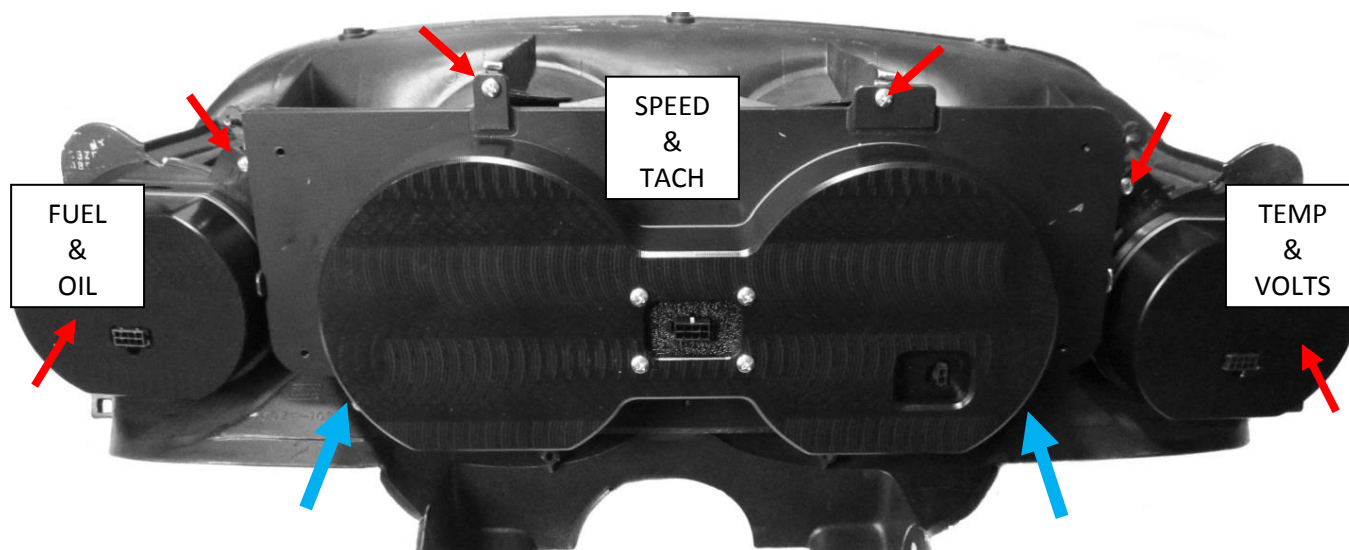

- Make the interconnect harness connections to the gauges with their respective length ends.

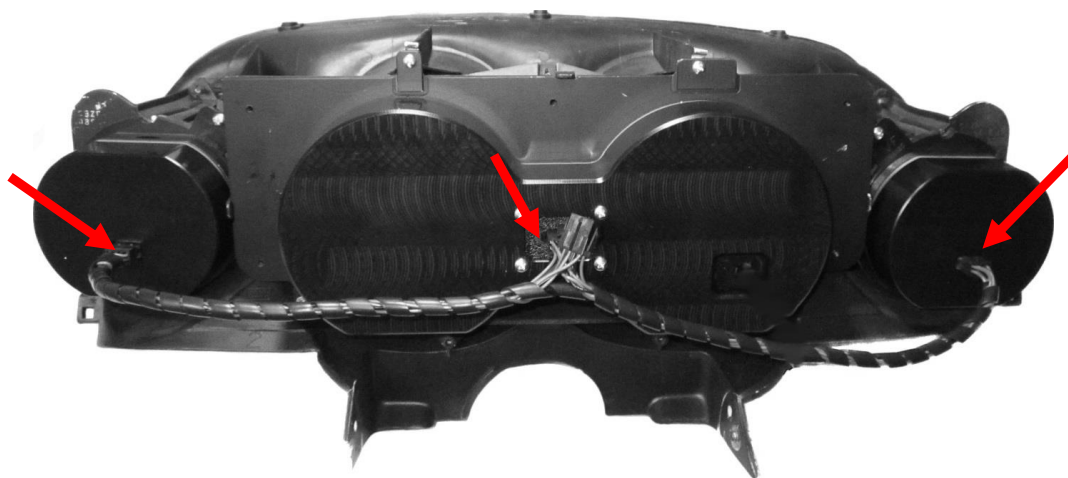

6. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the RTX system.

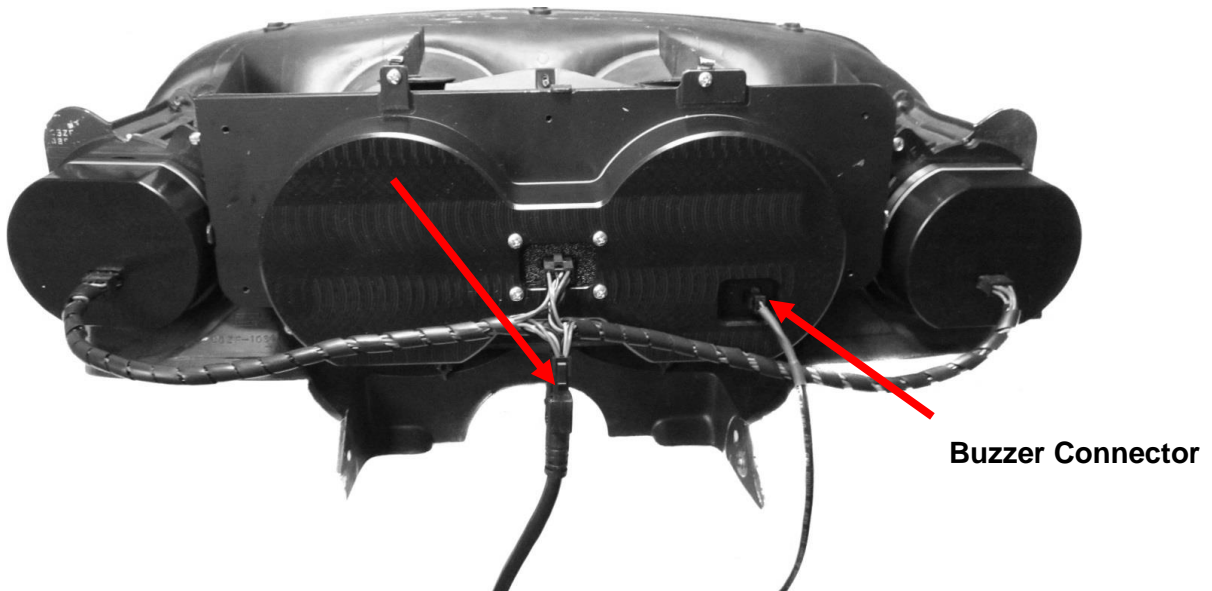

7. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the RTX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2019 - Dakota Digital